



Burris®

FIND WHAT MATTERS




**RT-Series™
Compact Sights**

User Guide

Burris RT sights are compact, 'Close Quarters' optics made for tactical carbines. Burris RT-1, with its 1x magnification and 2 MOA red dot, provides quick target acquisition for close or fast-moving targets. The RT-3 and RT-5 have illuminated reticles that are perfect for close to medium range targets and feature easy-to-use bullet drop-compensation for accurate shots out to 600 yards.

RT-1





2 MOA DOT

RT-1 Base

The RT-1 comes with a standard and a high base mount, both of which match the Trijicon® MRO® footprint.* Select the base that provides the best mounting height. To remove the base, use the supplied torx wrench to loosen the four screws on bottom of the sight. The base is symmetrical so there is no special orientation. Tighten the screws to 15 in-lbs. of torque and you're ready to mount the sight on the rail.



*TRIJICON and MRO are trademarks of Trijicon, Inc. Burris Company and its goods are not sponsored or endorsed by or otherwise affiliated with or related to Trijicon, Inc. or its products.

RT-3



RT-5



Mounting the Optic

Each sight comes factory-ready to mount to a Picatinny rail system. Using the supplied Torx wrench, loosen the screw(s) on the right side of the base to open the mount just enough to fit over the width of the rail. Once positioned on the rail, test for proper eye relief. Once properly located on the rail, use the wrench to tighten the base screw(s) to 45 in. - lbs.

Reticle Focus Adjustment

The RT-3 and RT-5 have a diopter adjustment ring on the ocular end which is used to sharpen reticle focus to your preference.

Battery Installation / Replacement

The RT-1, RT-3 and RT-5 are each powered by a single CR 2032 3V lithium battery. The battery compartment is on the right side of the sight. To open the compartment, turn the cap counter-clockwise. Drop in the battery with the positive side (+) face up and re-tighten cap completely. To preserve battery life, all RT

sights are equipped with an Auto-Shut Off. The sight automatically turns off after 4 hours on the 4 brightest settings and 8 hours on the 3 night vision settings.


Red Dot / Reticle

Illumination Adjustment

To activate the red dot on the RT-1 or illuminate the reticle of the RT-3 or RT-5, press any button on the top of the sight. Once the dot/reticle is illuminated, the forward and back buttons can be used to select any of the 7 brightness settings. To turn the sight off, press and hold the rear button on top of the sight for 4 seconds.

Windage /Elevation Adjustment


The elevation adjustment screw is located on top of the sight. The windage adjustment screw is located on the right side of the sight. Use a small screwdriver to adjust point of aim up and down or left and right. Arrows on the dial indicate direction of movement.

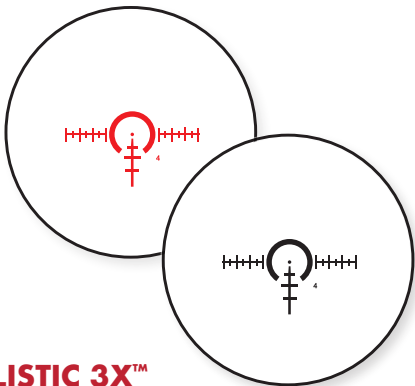

BALLISTIC 3X™


- Stadia lines and center horseshoe are optimized for viewing at 3x magnification
- Fine aiming lines for elevation and windage adjustment, precise shot placement at distance
- Proven broken circle design with center dot for ultra-fast engagement at short distances
- Illumination is daylight bright and won't wash out in harsh light

BALLISTIC 3X DETAIL

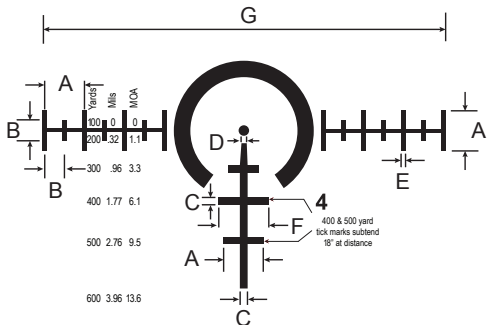

RETICLE SUBTENSIONS (in Mils)


Model	A	B	C	D	E	F	G
RT-3	1	.50	.175	.125	.1	1.25	10

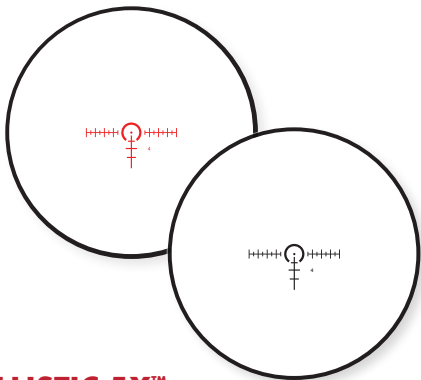

BALLISTIC 5X™

- Versatile tactical reticle with milradian measurements.
- Illuminated broken circle with center dot allows for ultra-fast engagement at short distances.
- Trajectory compensation out to 600 yards.
- Ideal for achieving long-range accuracy with 5.56 and .223 ammunition.

BALLISTIC 5X™ DETAIL

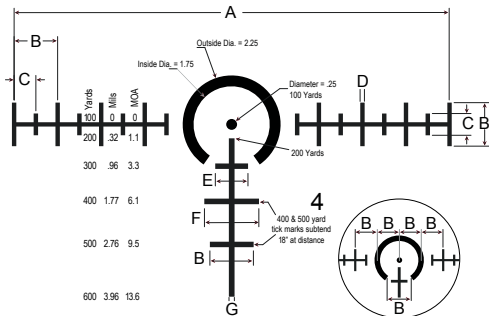

RETICLE SUBTENSIONS (in Mils)

Units	A	B	C	D	E	F	G
Mils	10	1	.5	.125	.75	1.25	.175

SPECIFICATIONS

	RT-1	RT-3	RT-5
Item	300261	300262	300263
Magnification	1x	3x	5x
Objective End Diameter	33.5 mm	33.8 mm	33.8 mm
Clear Objective Diameter	25 mm	20 mm	25 mm
Ocular End Diameter	24 mm	35 mm	35 mm
Reticle	2 MOA Dot	Ballistic 3x	Ballistic 5X
Illumination	Yes	Yes	Yes
Finish	Matte	Matte	Matte
Mount	Picatinny	Picatinny	Picatinny
Eye Relief	Infinite	2.6 in.	2.6 in.
Click Value	0.5 MOA	1 MOA	1 MOA
Elevation Travel	120 MOA	100 MOA	70 MOA
Windage Travel	120 MOA	100 MOA	70 MOA
Length	2.75 in.	3.5 in.	4.25 in.
Weight	4.8 oz.	8.8 oz.	9.5 oz.
Battery	CR2032	CR2032	CR2032



Warranty

We will repair or replace your Burris optic if it is damaged or defective. The warranty is automatically transferred to future owners.

- No repair or replacement charge
- No warranty card needed
 - No receipt needed
 - No questions asked



Burris[®]

FIND WHAT MATTERS

Burris Company

331 East 8th St. • Greeley, CO 80631

(970) 356-1670

BurrisOptics.com

Facebook.com/BurrisOptics

INSTR-9507