




# Burris

FIND WHAT MATTERS

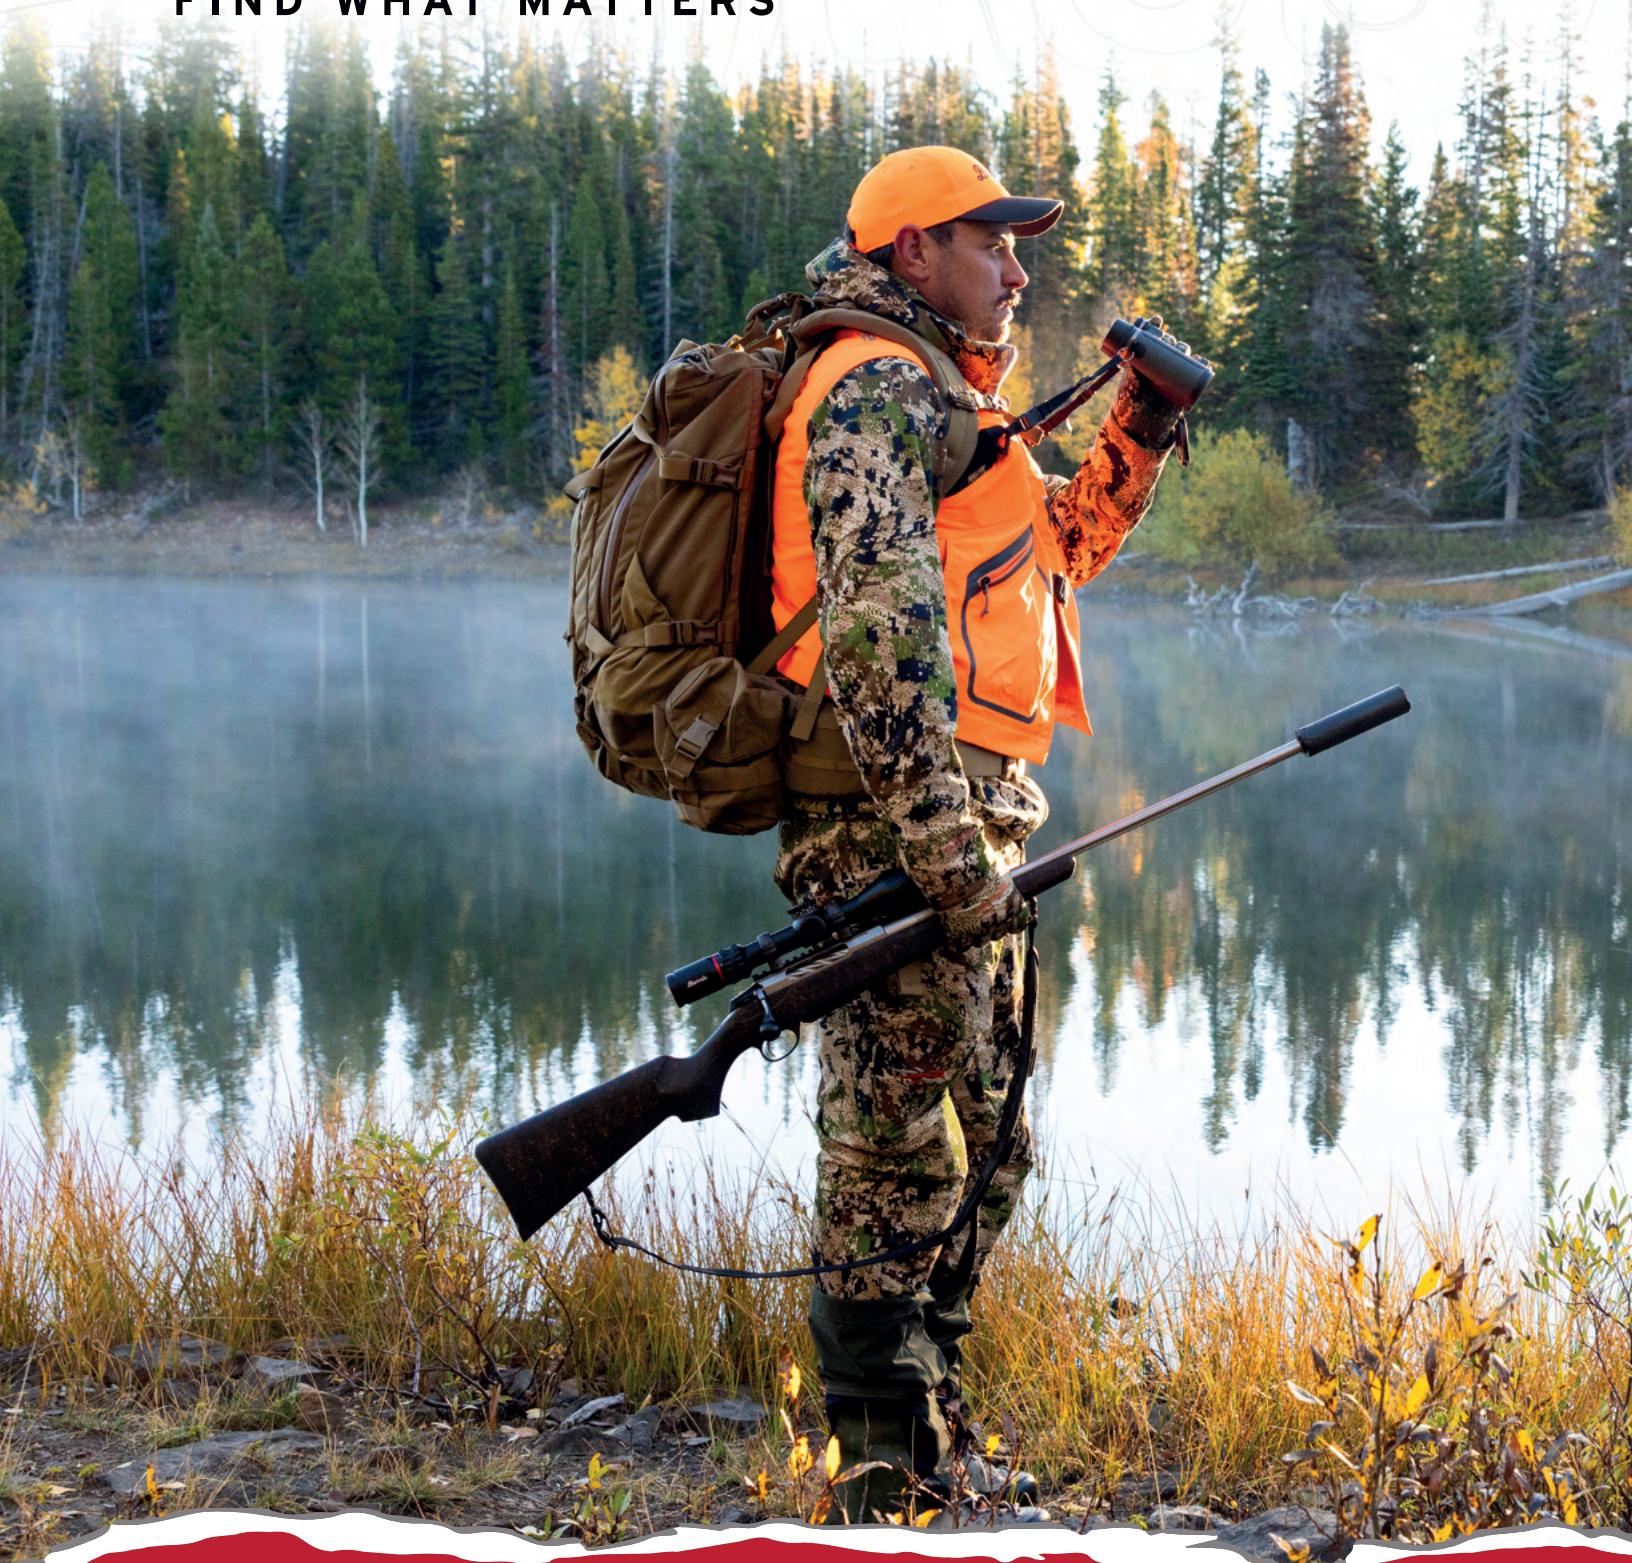

2026 | PRODUCT CATALOG

## TABLE OF CONTENTS

BURRISCONNECT	3
<b>HUNTING</b>	
ELIMINATOR® LASERSCOPES®	6
VERACITY™ PH RIFLESCOPES	8
FULLFIELD™ RIFLESCOPES	10
VERACITY™ RIFLESCOPES	12
SIGNATURE HD™ RIFLESCOPES	14
FULLFIELD E1™ RIFLESCOPES	16
DROPTINER™ RIFLESCOPES	18
SCOUT™ SCOPES	20
HANEGUN SCOPES	21
<b>OBSERVATION</b>	
SIGNATURE™ LRF 2000	24
SIGNATURE™ LRF 10X42	25
SIGNATURE™ HD BINOCULARS	26
DROPTINER™ HD BINOCULARS	27
SIGNATURE™ HD SPOTTING SCOPE	28
<b>ARCHERY</b>	
ORACLE™ X CROSS BOWSIGHT	31
<b>THERMAL</b>	
BTS35 V3	34
BTC35 V3	35
BTH35 V3	36
<b>TACTICAL</b>	
XTR PS	40
XTR PRO™ RIFLESCOPES	42
XTR III™ RIFLESCOPES	44
FASTFIRE E	46
FASTFIRE™ C RED DOT SIGHT	48
FASTFIRE™ 4 RED DOT SIGHTS	50
<b>RINGS &amp; MOUNTS</b>	
FASTFIRE™ MOUNTS	54
AR P.E.P.R. / SIGNATURE QD™ MOUNTS	56
XTR™ MOUNTS	57
SIGNATURE™ MOUNTS	58
BASES	60

# 2026 NEW PRODUCT



## NEW VERACITY SERIES

Page 10

For 2026, Burris proudly introduces the next generation of Veracity riflescopes—a complete redesign that elevates this proven platform with enhanced optical performance, refined ergonomics, and innovative new features to help hunters find success in any environment.




# BURRISCONNECT

## MOBILE APP

A ballistics powerhouse at your fingertips, the BurrisConnect app serves as the solution for operating PEK equipped optics, live media sharing on Burris Thermal, and the go-to ballistics tool for every shooter. BurrisConnect offers users the latest in bullet data to build DOPE cards, reticle maps, Eliminator data tables, and custom rifle profiles. From seasoned long-range competition enthusiasts to those just getting their first rifle zeroed. The ever-evolving BurrisConnect app gives you everything you need to get dialed in.

Control and program products such as the Veracity PH, Eliminator 6, XTRPS, and Thermal Optic line.

- Store Rifle profiles and ballistic data
- Adjust connected thermal device settings in real time via Wi-Fi
- Record video and capture images remotely with your thermal device.
- Build custom DOPE cards
- Reticle mapping for all Burris riflescopes
- Build Eliminator data tables

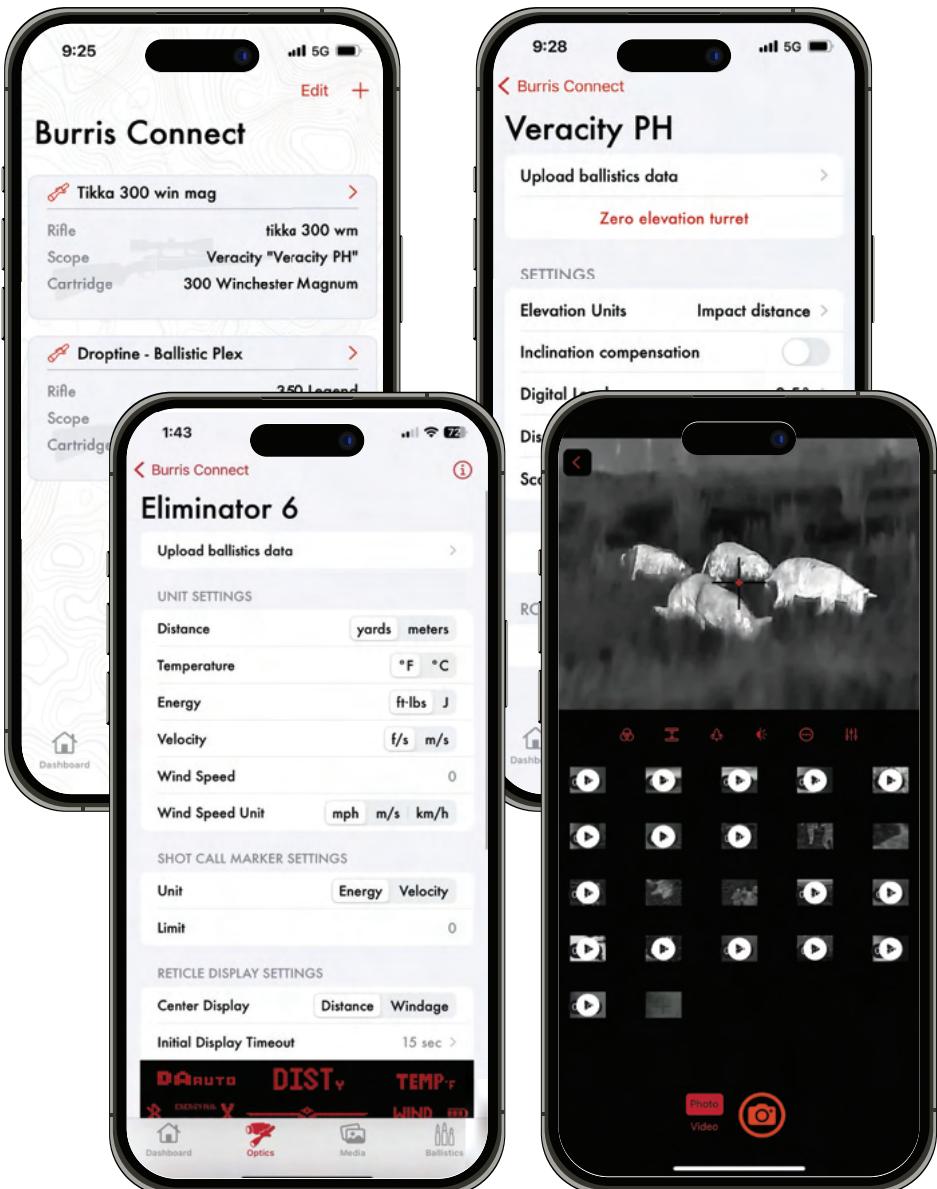

SCAN HERE FOR  
BURRISCONNECT  
FREE DOWNLOAD







# HUNTING





# ELIMINATOR™ 6 RIFlescopes



Driven by an elite hunter mindset, the guiding principles of 'Train Far. Hunt Responsibly. Don't Miss.' drove Burris engineers to integrate the most advanced ranging, environmental monitoring, optical performance, and ballistics technology into a single, unified platform.

The Eliminator 6 gives hunters the utmost confidence in their ability to make the right shot under the toughest conditions, with an entirely fresh, more streamlined appearance. When using the Eliminator 6, simply range your target, hold the illuminated aiming point on your target, and pull the trigger.

## ELIMINATOR RIFLESCOPE

### ELIMINATOR 6 4-20X56MM

ITEM # 200177 | RETICLE X177 | MSRP \$3,000



★★★★★  
SIGNATURE WARRANTY  
— BURRIS OPTICS —



- 2,000 YARD RANGEFINDER
- HEADS UP DISPLAY WITH 11 DATA ZONES
- ENVIRONMENTAL MONITORING
- BALLISTIC COMPENSATION
- PRECISE AIMING SOLUTIONS
- COMPREHENSIVE USER INTERFACE
- SHOT CALL MARKER
- X177 RETICLE
- BLUETOOTH FOR BURRISCONNECT
- ED LOW-DISPERSION GLASS

## ELIMINATOR 6 4-20X52MM



### SPECIFICATIONS

ELIMINATOR RIFlescopes	4-20x52	5-20x50	
ITEM NUMBER	200177	200155	
MAGNIFICATION	4-20x	5-20x	
OBJECTIVE LENS DIAMETER	52 mm	50 mm	
OBJECTIVE TUBE DIAMETER	60.1 mm	55 mm	
TUBE DIAMETER	34 mm	Mounting Clamps	
OCULAR END DIAMETER	44.28 mm	42 mm	
LASER RANGE	2,000 yd	2,000 yd	
FIELD OF VIEW (feet @ 100 yards)	Low High	30.5 ft 6.5 ft	22 ft 5.8 ft
EYE RELIEF		3.4 in. 3.5 in.	
EXIT PUPILS	Low High	8.6 mm 2.9 mm	10 mm 2.5 mm
DIOPTER SETTING		+2 to -3	+2 to -3
RETICLE PLANE		REAR	REAR
RETICLE	X177	X96	
TOTAL RETICLE CORRECTION	35 MOA	32 MOA	
RETICLE ILLUMINATION	Push Button/Auto 9 Levels	Push Button/Auto 5 Levels	
BATTERY	CR 123A x1	AAA x2	
LENGTH	14.6 in.	15.5 in.	
WEIGHT	30 oz	28.8 oz	
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE	40 MOA	50 MOA	
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)	1/8 MOA	1/8 MOA	
REMOTE	Bluetooth	Bluetooth	
REMOTE BATTERY	CR2032 x1	CR2032 x1	
PARALLAX/FOCUS RANGE	25 yd to Infinity	30 yd to Infinity	
OPERATING TEMPERATURE	-4 °F to +110 °F	-4 °F to +110 °F	





# VERACITY™ PH RIFLESCOPES



Years of development and pushing the limits of what is possible in a rifle optic has led up to this moment. Introducing the Veracity PH from Burris, the perfect combination of reliability, quality, and technology delivering the fastest and most precise aiming solution in a hunting optic, ever. Dial to distance with confidence and let Burris do the math.

Featuring the new Burris PEK (Programmable Elevation Knob) the Veracity PH takes speed and precision to the highest level.



## VERACITY PH RIFLESCOPE

### VERACITY PH 4-20x50


MSRP \$1,560 | RC-MOA | ITEM # 200203



## SPECIFICATIONS

VERACITY PH RIFLESCOPES		4-20x50
ITEM NUMBER		200203
MAGNIFICATION		4-20x
OBJECTIVE LENS DIAMETER		50 mm
OBJECTIVE TUBE DIAMETER		57.91 mm
TUBE DIAMETER		30mm
OCULAR END DIAMETER		44.19 mm
FIELD OF VIEW (feet @ 100 yards)	Low	26.0 ft
	High	5.5 ft
EYE RELIEF	Low	90.0 mm
	High	92.3 mm
EXIT PUPILS	Low	10.8 mm
	High	2.5 mm
DIOPTER SETTING		+2 to -3
RETICLE PLANE		Front
RETICLE		RC-MOA
RETICLE ILLUMINATION		Rotary Dial, 4 Levels
BATTERY		CR 2450 x2
LENGTH		15 in.
WEIGHT		29.1 oz
ELEVATION TURRET MARKING GRADUATIONS		1/4 MOA
ELEVATION TURRET DIGITAL RESOLUTION		1/10 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		80 MOA
ELEVATION TURRET TRAVEL LIMIT**		33.8 MOA
WINDAGE TURRET GRADUATIONS		1/4 MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		45 MOA
WINDAGE TURRET TRAVEL LIMIT**		24 MOA
PARALLAX FOCUS		Side Focus
PARALLAX/FOCUS RANGE		25 yd to Infinity
OPERATING TEMPERATURE		-20 °F to +140 °F
STORAGE TEMPERATURE		-40 °F to +160 °F

The **VERACITY PH** features a built-in heads-up display and provides customizable ballistic data, including dialed elevation distance in yards, meters, or MOA, as well as rifle cant, range- compensated wind value, and optic battery level in real time.

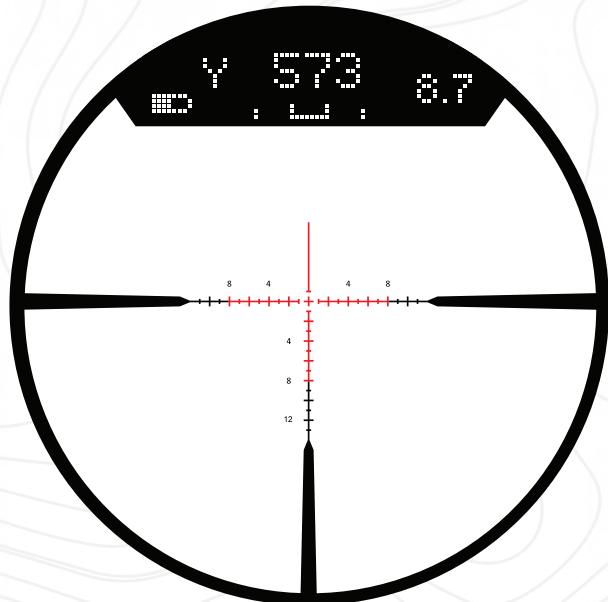

RC-MOA RETICLE

- BLUETOOTH TO BURRISCONNECT
- PĒK – PROGRAMMABLE ELEVATION KNOB
- HUD – HEADS UP DISPLAY
- ZERO TURN STOP ADJUSTMENT KNOBS
- FRONT FOCAL PLANE (FFP) RETICLE
- OPTIC OF THE YEAR NRA AMERICAN HUNTER
- GOLDEN BULLSEYE AWARD 2024

\* Example: 50-MOA total adjustment range equates to roughly 25 MOA in either direction from center.

\*\* Rotation-limited dial: this is the amount of available travel after zeroing the turret.





# VERACITY™ RIFLESCOPES

Veracity means truth and accuracy. The Veracity riflescope line was built to deliver a premium experience and absolute confidence when the shot matters most. With proven reliability, class leading optical performance, and a purpose-driven design, this scope family has earned its place as a trusted rifle optic in the field and at the range. The latest generation pushes that legacy further with expanded configurations, a more rugged and compact design, giving shooters a precise, dependable scope no matter the conditions.

- 5X MAGNIFICATION
- RFP AND FFP OPTIONS
- 5 RETICLE CHOICES
- FULLY MULTI-COATED LENSES / ED GLASS
- KNOB SYNERGY™ KNOBS



## VERACITY RIFLESCOPE SERIES



### NEW VERACITY 2-10x42

ITEM # 200670 | 3PW-MOA | MSRP \$1,080

ITEM # 200671 | PLEX FIBER DOT | MSRP \$1,080



### NEW VERACITY 3-15x44

ITEM # 200680 | RC-MOA | MSRP \$1,200

ITEM # 200681 | PLEX FIBER DOT | MSRP \$1,200

ITEM # 200682 | PLEX | MSRP \$1,080



### NEW VERACITY 5-25x50

ITEM # 200690 | RCT-MOA | MSRP \$1,560



## SPECIFICATIONS

VERACITY RIFlescopes	2.5-12x42	3-15x44	5-25x50
ITEM NUMBER	200670, 200671	200680, 200681, 200682	200690
MAGNIFICATION	2-12x	3-15x	5-25x
OBJECTIVE LENS DIAMETER	42 mm	44 mm	50 mm
OBJECTIVE BELL DIAMETER	49.5 mm	52 mm	58 mm
TUBE DIAMETER	30 mm	30 mm	30 mm
OCULAR END DIAMETER	44.25 mm	44.25 mm	44.25 mm
FIELD OF VIEW (feet @ 100 yards)	Low 42.0 ft High 8.5 ft	34.5 ft 7.0 ft	21.25 ft 4.5 ft
EYE RELIEF	Low 5.1 in High 4.3 in	129.5 mm 109.2 mm	5.1 in 129.5 mm 4.1 in 104.1 mm
EXIT PUPILS	Low 11.2 mm High 3.7 mm	11.0 mm 3.1 mm	9.8 mm 2.7 mm
DIOPTER SETTING	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE	Rear   Rear	Front   Rear   Rear	Front
RETICLE	3PW-MOA Plex Fiber Dot	RC-MOA Plex Fiber Dot Plex	RCT-MOA
KNOB STYLE*	Knob Synergy - Exposed Pro	Knob Synergy - Exposed Pro	Knob Synergy - Exposed Pro
LENGTH	12.5 in.   318 mm	13.0 in.   330 mm	15.25 in.   387 mm
WEIGHT	25.2 oz   714 g	24.8 oz   703 g	28.1 oz   797 g
ELEVATION CLICK VALUE	1/4 MOA	1/4 MOA	1/4 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*	95 MOA	77 MOA	60 MOA
ELEVATION TURRET TRAVEL LIMIT**	46 MOA	46 MOA	46 MOA
WINDAGE CLICK VALUE	1/4 MOA	1/4 MOA	1/4 MOA
TOTAL WINDAGE ADJUSTMENT RANGE*	95 MOA	77 MOA	60 MOA
PARALLAX/ FOCUS RANGE	25 yd to Infinity	25 yd to Infinity	25 yd to Infinity
OPERATING TEMPERATURE	-40 °F to +160 °F -40 °C to +71 °C	-40 °F to +160 °F -40 °C to +71 °C	-40 °F to +160 °F -40 °C to +71 °C
BATTERY	CR2032	CR2032	CR2032



All second-generation Veracity riflescopes feature Burris' new R.E.D. (Rapid Engagement Design), highlighted by a bold red ocular accent ring and high-traction knurling for a secure grip in any condition. The modular Knob Synergy™ System allows

fully customizable turret configurations, including custom-lasered exposed elevation knobs, exposed windage knobs, or an Advanced Capped Elevation Knob. Every Veracity includes the exposed, multi-turn Pro Elevation Knob with Zero Click Stop—delivering fast, repeatable adjustments and positive control.



Plex



Fiber Plex



3PW-MOA



RC-MOA



RCT-MOA



ITEM 626404  
Advanced Exposed Pro





# FULLFIELD RIFLESCOPES



KNOB SYNERGY      R.E.D.      ZERO CLICK STOP



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



Built lighter, shorter, and stronger, it's designed for unmatched maneuverability in the field. Precision-crafted with fully multi-coated lenses for exceptional clarity and maximum light transmission, it thrives in low-light conditions.



ITEM 626400  
Standard Capped

ITEM 626401  
Advanced Capped

ITEM 626402  
Advanced Exposed

ITEM 626403  
Advanced Exposed  
Windage

## 2-8X35MM

ITEM # 201500

SC | ILLUM. | MSRP \$240

ITEM # 201501

SC | MSRP \$204

## 2.5-10X42MM

ITEM # 201511

SC | ILLUM. | MSRP \$288

ITEM # 201512

SC | MSRP \$228

## 3-12X42MM

ITEM # 201530

SC | MSRP \$324

ITEM # 201531

SC | MSRP \$312

ITEM # 201533

AE | ILLUM. | MSRP \$420

## 3-12X56MM

ITEM # 201540

SC | ILLUM. | MSRP \$360

ITEM # 201541

SC | MSRP \$360

ITEM # 201542

SC | ILLUM. | MSRP \$420

## 4-16X50MM

ITEM # 201550

SC | ILLUM. | MSRP \$480

ITEM # 201552

AE | MSRP \$480

ITEM # 201553

AC | MSRP \$444

## 6-24X50MM

ITEM # 201500

AE | ILLUM. | MSRP \$600



## SPECIFICATIONS

FULLFIELD RIFLESCOPES ITEM #	201500, 205501	201511, 201512	201530, 201531, 201533,	201540, 201541, 201542	201550, 201552, 201553,	201560		
<b>MAGNIFICATION</b>	2-8x35mm	2.5-10x42mm	3-12x42mm	3-12x56mm	4-16x50mm	6-24x50mm		
<b>OBJECTIVE OUTER TUBE DIAMETER</b>	44.5mm	51.5mm	51.5mm	64.5mm	59mm	59mm		
<b>OCULAR DIAMETER</b>	41mm	41mm	41mm	41mm	41mm	41mm		
<b>TUBE DIAMETER</b>	1"	1"	1"	30mm	1"	30mm		
<b>OBJECTIVE LENS DIAMETER</b>	35mm	42mm	42mm	56mm	50mm	56mm		
<b>FIELD OF VIEW (FT @ 100 YARDS)</b>	low high	low high	43 11	36 9.25	36.5 9	27 6.75	low high	17 4.8
<b>EYE RELIEF</b>	low high	4.2 3.8	low high	4.1 3.9	low high	4.2 3.8	low high	4.2 3.8
<b>EXIT PUPIL</b>	low high	low high	10.1 4.6	10.5 3.5	9.7 5.0	10.0 3.8	low high	8.5 2.9
<b>DIOPTER SETTING</b>	+2 to -3	+2 to -3	+2 to -3	+2 to -3	+2 to -3	+2 to -3		
<b>FOCAL PLANE</b>	Rear	Rear	Rear	Rear	Rear	Rear		
<b>BATTERY (FOR ILLUMINATED MODELS ONLY)</b>	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032		
<b>LENGTH</b>	9.75"	10.5"	11.1"	11.2"	12.3"	14.4"		
<b>WEIGHT</b>	13.5oz	15.4oz	15.3oz	19.2oz	17.7oz	18.9oz		
<b>ELEVATION TURRET MARKING GRADUATIONS</b>	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA		
<b>TOTAL ELEVATION ADJUSTMENT RANGE</b>	79 MOA	79 MOA	70 MOA	93 MOA	52 MOA	62 MOA		
<b>WINDAGE TURRET GRADUATIONS (CLICKS)</b>	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA	1/4 MOA		
<b>TOTAL WINDAGE ADJUSTMENT RANGE</b>	79 MOA	79 MOA	70 MOA	93 MOA	52 MOA	48 MOA		
<b>PARALLAX FOCUS</b>	Fixed	Fixed	Fixed/Side Focus	Fixed/Side Focus	Side Focus	Side Focus		
<b>PARALLAX/FOCUS RANGE</b>	100yd	100yd	100yd/25yd to Infinity	100yd	25yd to Infinity	25yd to Infinity		
<b>OPERATING TEMPERATURE</b>	-20 °F to +140 °F	-20 °F to +140 °F	-20 °F to +140 °F	-20 °F to +140 °F	-20 °F to +140 °F	-20 °F to +140 °F		
<b>STORAGE TEMPERATURE</b>	-40 °F to +160 °F	-40 °F to +160 °F	-40 °F to +160 °F	-40 °F to +160 °F	-40 °F to +160 °F	-40 °F to +160 °F		
<b>WATERPROOF RATING</b>	IPX7	IPX7	IPX7	IPX7	IPX7	IPX7		





# SIGNATURE™ HD RIFLESCOPES

Built on a legacy of reliability and confidence when it matters most, the new Burris Signature Series line of riflescopes offers shooters the Burris Signature experience with bright clear optics and rugged dependability. Available in three different magnification levels and various front and rear focal plane reticle options, the Signature Series brings high-end features to a platform serious hunters and shooters will enjoy.



## SIGNATURE HD RIFLESCOPE SERIES



### SIGNATURE HD 2-10x40

MSRP \$480 | RETICLE BALLISTIC E3™ | ITEM#200530



### SIGNATURE HD 3-15x44

MSRP \$720 | BALLISTIC PLEX E1™ | ITEM # 200531

MSRP \$660 | FINE PLEX™ | ITEM # 200532



### SIGNATURE HD 5-25x50

MSRP \$960 | BALLISTIC E3™ Illu. | ITEM # 200533

MSRP \$900 | FINE PLEX™ | ITEM # 200534

MSRP \$1,020 | 6.5 CM™ FFP | ITEM # 200535




3-15x44mm


## SPECIFICATIONS

SIGNATURE HD RIFlescopes	2-10x40	3-15x44	3-15x44	5-25x50	5-25x50	5-25x50
ITEM NUMBER	200530	200531	200532	200533	200534	200535
MAGNIFICATION	2-10x	3-15x	3-15x	5-25x	5-25x	5-25x
OBJECTIVE LENS DIAMETER	40 mm	44 mm	44 mm	50 mm	50 mm	50 mm
OBJECTIVE END DIAMETER	49.2 mm	53.09 mm	53.09 mm	59.18 mm	59.18 mm	59.18 mm
OCULAR END DIAMETER	4.2 mm	44.96 mm	44.96 mm	44.96 mm	44.96 mm	44.96 mm
TUBE DIAMETER	1 in.	1 in.	1 in.	30 mm	30 mm	30 mm
FIELD OF VIEW (feet @ 100 yards)	Low High	54.0 ft 10.8 ft	37.5 ft 7.5 ft	37.5 ft 7.5 ft	22.5 ft 4.5 ft	22.5 ft 4.5 ft
EYE RELIEF	Low High	3.8 in. 3.5 in.	3.8 in. 3.5 in.	3.8 in. 3.5 in.	3.6 in. 3.3 in.	3.6 in. 3.3 in.
EXIT PUPILS	Low High	8 mm 3.5 mm	8 mm 3.3 mm	8 mm 3.3 mm	8 mm 2.2 mm	8 mm 2.2 mm
DIOPTER SETTING	+2 to -3					
RETICLE PLANE	Rear	Rear	Rear	Rear	Rear	Front
RETICLE	Ballistic E3	Ballistic E3 Illuminated	Plex	Ballistic E3 Illuminated	Fine Plex	6.5 CM Illuminated
LENGTH	11.75 in.	13.13 in.	13.13 in.	14.3 in.	14.3 in.	14.3 in.
WEIGHT	17.6 oz	20.8 oz	20 oz	24 oz	23.2 oz	24 oz
ELEVATION TURRET MARKING GRADUATIONS	1/4 MOA					
KNOB STYLE	Short - Push /Pull Locking	Short - Push /Pull Locking	Tall - Push / Pull Locking	Short - Push /Pull Locking	Tall - Push / Pull Locking	Tall - Push / Pull Locking
TOTAL ELEVATION ADJUSTMENT RANGE*	120 MOA	80 MOA	80 MOA	65 MOA	65 MOA	65 MOA
WINDAGE TURRET GRADUATIONS (clicks)	1/4 MOA					
TOTAL WINDAGE ADJUSTMENT RANGE*	120 MOA	80 MOA	80 MOA	65 MOA	65 MOA	65 MOA
PARALLAX/FOCUS RANGE	Fixed @ 100 yd	25 yd to Infinity				


The **SIGNATURE HD** features a 5x zoom system with premium, fully multi-coated glass for crisp, bright images and new push/pull locking turrets. It's available with a wide choice of front and rear focal plane reticles. Most models include a side parallax adjustment and zero stop feature on all target knobs.



Ballistic E3™



Ballistic E3™ Illuminated



Plex™



6.5 CM™ Illuminated

\* NOTE: The illuminated reticle scopes are powered by a CR2032 lithium battery and have 6 brightness settings.

\* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.





# FULLFIELD™ E1

## RIFLESCOPES

If you had to pick just one scope that defines our DNA, it's the Fullfield. The original Fullfield and Fullfield E1 represent 50 years of performance, reliability, and countless filled tags. The Burris Fullfield E1™ continues that legacy. We've fine-tuned the reticles for added accuracy, and the updated the power ring zoom to make it easier to turn and keep the lens covers from turning. But we haven't forgotten any of the features that made this scope line so popular.



**SIGNATURE WARRANTY**  
BURRIS OPTICS



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

### FULLFIELD E1 RIFLESCOPE SERIES



#### FULLFIELD E1 3-9x40 | ITEM # 200346

MSRP \$204 | BALLISTIC PLEX | SHOTGUN



#### FULLFIELD E1 3-9x40 | ITEM # 200347

MSRP \$204 | BALLISTIC PLEX | MUZZLELOADER



#### FULLFIELD E1 3-9x40 | ITEM # 20348

MSRP \$204 | BALLISTIC PLEX | .450 BUSHMASTER



#### FULLFIELD E1 3-9x40 | ITEM # 200366

MSRP \$204 | BALLISTIC PLEX | .350 LEGEND




## SPECIFICATIONS

FULLFIELD E1 RIFlescopes	3-9x40	3-9x40	3-9x40	3-9x40
ITEM NUMBER	200346	200347	200348	200346
DESCRIPTION	SHOTGUN	MUZZLELOADER	.450 BUSHMASTER	.350 LEGEND
MAGNIFICATION	3-9x	3-9x	3-9x	3-9x
OBJECTIVE LENS DIAMETER	40 mm	40 mm	40 mm	40 mm
OBJECTIVE END DIAMETER	48 mm	48 mm	48 mm	48 mm
OCULAR END DIAMETER	39 mm	39 mm	39 mm	39 mm
TUBE DIAMETER	1 in.	1 in.	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	33 ft 13 ft	33 ft 13 ft	33 ft 13 ft
EYE RELIEF	Low High	3.4 in. 3.1 in.	3.4 in. 3.1 in.	3.4 in. 3.1 in.
EXIT PUPILS	Low High	13 mm 5 mm	13 mm 5 mm	13 mm 5 mm
DIOPTER SETTING		+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE		Rear	Rear	Rear
RETICLE		Ballistic Plex	Ballistic Plex	Ballistic Plex
LENGTH		12.2 in.	12.2 in.	12.2 in.
WEIGHT		13.0 oz	13.0 oz	13.0 oz
ELEVATION TURRET MARKING GRADUATIONS		1/4 MOA	1/4 MOA	1/4 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		50 MOA	50 MOA	50 MOA
WINDAGE TURRET GRADUATIONS (Clicks)		1/4 MOA	1/4 MOA	1/4 MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		50 MOA	50 MOA	50 MOA
PARALLAX/FOCUS RANGE		Fixed @ 50 yd	Fixed @ 50 yd	Fixed @ 50 yd

\* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.



Explore precise load details for your reticle  
on the BurrisConnect app or visit  
[BurrisOptics.com/ballistic-tools](http://BurrisOptics.com/ballistic-tools).



Ballistic Plex™





# DROPTINE™ RIFLESCOPES

Step into legendary Burris performance with a scope that steps up your game. Our reliable, high-quality glass is glare-resistant and excels in low light, featuring a shockproof design that gives you the most for your dollar. The Droptine is an easy-to-use, rugged hunting riflescope designed to help you bring home big game for years to come.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

## DROPTINE RIFLESCOPE

### DROPTINE RIFLESCOPE 3-9x40

MSRP \$180 | BALLISTIC PLEX™ | ITEM # 200017

MSRP \$168 | BALLISTIC PLEX™ | ITEM #200019  
(Calibrated for .22 LR ammo)



### DROPTINE RIFLESCOPE 4.5-14x42

MSRP \$216 | BALLISTIC PLEX™ | ITEM #200019






## SPECIFICATIONS

DROPTINE RIFLESCOPES	3-9x40	3-9x40	4.5-14x42
ITEM NUMBER	200017	200019	200077
MAGNIFICATION	3-9x	3-9x	4.5-14x
OBJECTIVE LENS DIAMETER	40 mm	40 mm	42 mm
OBJECTIVE END DIAMETER	48 mm	48 mm	51.5 mm
OCULAR END DIAMETER	39 mm	39 mm	39 mm
TUBE DIAMETER	1 in.	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	33 ft 13 ft	22 ft 7.5 ft
EYE RELIEF	Low High	3.4 in. 3.1 in.	3.4 in. 3.1 in.
EXIT PUPILS	Low High	13 mm 5 mm	9 mm 3 mm
DIOPTER SETTING	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE	Rear	Rear	Rear
RETICLE	Ballistic Plex	Ballistic Plex	Ballistic Plex
LENGTH	12.2 in.	12.2 in.	12.6 in.
WEIGHT	13.0 oz	13.0 oz	15.3 oz
ELEVATION TURRET MARKING GRADUATIONS	1/4 MOA	1/4 MOA	1/4 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*	50 MOA	50 MOA	40 MOA
WINDAGE TURRET GRADUATIONS (Clicks)	1/4 MOA	1/4 MOA	1/4 MOA
TOTAL WINDAGE ADJUSTMENT RANGE*	50 MOA	50 MOA	40 MOA
PARALLAX/FOCUS RANGE	Fixed @ 100 yd	Fixed @ 50 yd	50 yd to Infinity

### The DROPTINE features...

- Parallax adjustment for improved accuracy at long distances.
- Quality precision-ground lenses are larger than those of comparable scopes for better light collection.
- Index-matched, Hi-Lume® multicoating glass aids in low light performance and glare reduction, increasing your success rate.
- Durable, integrated eyepiece design has no-slip grip for easy adjustment in the field.
- Positive steel-on-steel adjustments ensure repeatable accuracy.
- Waterproof
- Nitrogen-filled scope tubes prevent internal fogging, even in cold and rain.
- Stress-free, 1-piece, solid outer tube is durable enough to withstand shock and vibrations of even the heaviest recoiling calibers.
- Features the Ballistic Plex™ reticle, the most simple, effective, and elegant trajectory-compensating reticle for hunting.



Ballistic Plex™



Our slim, compact optics are specifically designed to match scout rifles, with low- to-medium magnification for close- to mid-range targets. When placed well forward on the rifle, you'll maintain perfect focus on moving and stationary targets. When that happens, we all know what goes down next.



### SCOUT HANDGUN SCOPE



#### SCOUT RIFLESCOPE 2-7x32

MSRP \$564 | BALLISTIC PLEX™ | ITEM # 200261



#### SCOUT RIFLESCOPE 2.75x20


MSRP \$360 | HEAVY PLEX™ | ITEM # 200269

DROPTINE RIFLESCOPES	2-7x32	2.75x20
ITEM NUMBER	200261	200269
MAGNIFICATION	2-7x	2.75x
OBJECTIVE LENS DIAMETER	32 mm	20 mm
OBJECTIVE END DIAMETER	39 mm	27 mm
OCULAR END DIAMETER	38 mm	35 mm
TUBE DIAMETER	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	23 ft 8 ft
EYE RELIEF	Low High	9.2 in. 12 in.
EXIT PUPILS	Low High	16 mm 4.6 mm
DIOPTER SETTING	+2 to -3	+2 to -3
RETICLE PLANE	Rear	Rear
RETICLE	Ballistic Plex	Heavy Plex
LENGTH	9.7 in.	9.2 in.
WEIGHT	13.0 oz	7.0 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*	66 MOA.	140 MOA
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)	1/4 in.	1/2 in.
PARALLAX / FOCUS RANGE	Fixed @ 100 yd	Fixed @ 100 yd

\* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.

# HANDGUN SCOPE

Given handgun hunters use seriously impressive cartridges, we built these durable and reliable scopes with superb recoil absorption and long eye relief, perfect for heavy recoil long-range shooting.



## HANDGUN SCOPES



ITEM # 200218



ITEM # 200229

### HANDGUN SCOPE 2x20 |

MSRP \$312.00 | BALLISTIC PLEX™



ITEM # 200279

ITEM # 200291

ITEM # 200299



ITEM # 200298

### HANDGUN SCOPE 2-7x32 |



MSRP \$468.00 | BALLISTIC PLEX™ / PLEX™



ITEM # 200309

### HANDGUN SCOPE 3-12x32

MSRP \$100.00 | BALLISTIC PLEX™



HANDGUN SCOPES	2x20	2-7x32	2-7x32	3-12x32
ITEM NUMBER	200218/229	200279/291/298	200299	200309
MAGNIFICATION	2x	2-7x	2-7x	3-12x
OBJECTIVE LENS DIAMETER	20 mm	32 mm	32 mm	32 mm
OBJECTIVE END DIAMETER	27 mm	39 mm	39 mm	44 mm
OCULAR END DIAMETER	35 mm	38 mm	38 mm	38 mm
TUBE DIAMETER	1 in.	1 in.	1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low High	21 ft 7 ft	21 ft 7 ft	14 ft 4 ft
EYE RELIEF	Low High	10 in. 24 in.	11-21 in. 10-14 in.	11-21 in. 10-14 in.
EXIT PUPILS	Low High	10 mm 4.6 mm	16 mm 4.6 mm	11 mm 2.7 mm
DIOPTER SETTING	+2 to -3	+2 to -3	+2 to -3	+2 to -3
RETICLE PLANE	Rear	Rear	Rear	Rear
RETICLE	Plex	Ballistic Plex/ Plex/Plex	Ballistic Plex/ Posi-Lock™	Ballistic Plex
LENGTH	8.9 in.	9.7 in.	9.7 in.	10.8 in.
WEIGHT	7.0 oz	13.0 oz	13.0 oz	16.0 oz
TOTAL ELEVATION/WINDAGE ADJUSTMENT RANGE*	80 in.	64 in.	64 in.	28 in.
ELEVATION/WINDAGE TURRET GRADUATIONS (Clicks)	1/2 in.	1/4 in.	1/4 in.	1/8 in.
PARALLAX / FOCUS RANGE	Fixed @ 100 yd	Fixed @ 100 yd	Fixed @ 100 yd	25 yd to Infinity

\* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.





# OBSERVATION



# SIGNATURE™ LRF 2000 RANGEFINDER

The perfect companion for your Burris riflescope, the Signature LRF 2000 redefines speed in a rangefinder. Quickly range targets from 5 to 2,400 yards using sport, hunting, or auto range modes, or scan the field with instant ranging using scan mode. With 7x magnification and HD glass, finding targets is easy.

## SIGNATURE LRF 2000

MSRP \$360 | TEM # 300351



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

## SPECIFICATIONS

ITEM NUMBER	300351
MAGNIFICATION	7x
FIELD OF VIEW @ 100 yd	31.5 mm
EYE RELIEF	16 mm
ANGLE RANGE	+70°
DIMENSIONS	4.75 in. x 3.25 in. x 1.5 in.
WEIGHT	6 oz
OPERATING TEMPERATURE	14 °F to 131 °F
POWER SOURCE	CR2 Lithium Battery xl
BATTERY LIFE	2,000 Ranges
LASER CERTIFICATION	Class 1





# SIGNATURE™ LRF 10X42 BINOCULAR



Well-known for integrating powerful rangefinders into optics, Burris introduces the Signature 10x42 LRF Binocular for fast and precise ranging from 5 to 2,600 yards. Ultrasharp HD glass and easy-to-read display offer comfortable glassing and blazing-fast ranging for both hunters and shooters.

## SIGNATURE LRF 10X42 BINOCULAR

MSRP \$1,200 | ITEM # 300299



## SPECIFICATIONS

ITEM NUMBER	300299
MAGNIFICATION	10x
FIELD OF VIEW @ 100 yd	334 ft
EYE RELIEF	16 mm
ANGLE RANGE	+70°
DIMENSIONS	6.0 in. x 5.5 in. x 2.7 in.
WEIGHT	36 oz
OPERATING TEMPERATURE	5 °F to 131 °F
POWER SOURCE	CR2 Lithium Battery xl
BATTERY LIFE	2,000 Ranges
LASER CERTIFICATION	Class 1





## SIGNATURE™ HD BINOCULARS

As the premium binocular in the Burris lineup, the Signature HD Binoculars offer high-performance HD lenses and BaK-4 prisms that produce sharper images and edge-to-edge clarity. The multi-coated lenses create maximum light transmission and minimize glare when viewing in harsh conditions.



### SIGNATURE HD 8x42

MSRP \$636 | ITEM # 300298

### SIGNATURE HD 10x42

MSRP \$696 | ITEM # 300297

### SIGNATURE HD 12x50

MSRP \$756 | ITEM # 300295

### SIGNATURE HD 15x56

MSRP \$1008 | ITEM # 300296

- The open bridge design reduces weight and ensures comfortable handling, available in 8x, 10, and 12x models.
- Nitrogen filling provides waterproof and fogproof performance in harsh weather conditions.
- Robust aluminum eyecups for extreme ruggedness



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED

## SPECIFICATIONS

ITEM NUMBER	300298	300297	300295	300293
MAGNIFICATION	8x	10x	12x	15x
OBJECTIVE DIAMETER	42 mm	42 mm	50 mm	56 mm
FOCUS SYSTEM	Fast Focus	Fast Focus	Fast Focus	Fast Focus
OPTICS SYSTEM	HD Roof Prism	HD Roof Prism	HD Roof Prism	HD Roof Prism
CLOSE FOCUS	8.2 ft	8.2 ft	13.1 ft	23.0 ft
FIELD OF VIEW @ 1,000 yd	330 yd	314 yd	251 yd	215 yd
EYE RELIEF	0.38 in.	0.61 in.	0.61 in.	0.69 in.
EXIT PUPIL	5.25 mm	4.2 mm	4.16 mm	3.7 mm
DIMENSIONS (IN.)	6 x 5.0 x 2.0	6 x 5.0 x 2.0	6.5 x 5.1 x 2.3	8.2 x 5.7 x 2.5
WEIGHT	25 oz	25 oz	28.5 oz	43 oz
IP DISTANCE RANGE	57 mm - 74 mm	57 mm - 74 mm	57 mm - 74 mm	60 - 75 mm
EYECUPS	Adjustable	Adjustable	Adjustable	Adjustable
WATERPROOF	1 m	1 m	1 m	1 m
OPERATING TEMP	-5 °F to 158 °F			



## DROPTINE™ HD BINOCULARS

Take command of low-light conditions with the Droptine HD Binocular(s), a seamless blend of unmatched clarity and uncompromising quality. Housed in a lightweight, compact design with an expansive field of view, the 8x or 10x magnification options enable your observation capabilities and extend your glassing sessions



### DROPTINE HD 8x42

MSRP \$300 | ITEM # 300278

### DROPTINE HD 10x42

MSRP \$324 | ITEM # 300279

- BaK-4 prisms and fully multi-coated lenses for maximum light transmission and reduced glare
- Nitrogen-filled for waterproof and fogproof performance in harsh weather conditions
- 8x magnification provides detail and a wide field of view
- 10x magnification is ideal for scouting eastern whitetail or western mule deer



### SPECIFICATIONS

ITEM NUMBER	300278	300279
MAGNIFICATION	8x	10x
OBJECTIVE DIAMETER	42 mm	42 mm
FOCUS SYSTEM	Fast Focus	Fast Focus
OPTICS SYSTEM	HD Roof Prism	HD Roof Prism
CLOSE FOCUS	7.5 ft	7.5 ft
FIELD OF VIEW @ 1,000 yd	393 yd	330 yd
EYE RELIEF	0.67 in.	0.59 in.
EXIT PUPIL	5.2 mm	4.17 mm
DIMENSIONS (IN.)	6 x 5.3 x 2.1	6 x 5.3 x 2.1
WEIGHT	26 oz	26 oz
IP DISTANCE RANGE	55 mm - 75 mm	55 mm - 75 mm
EYECUPS	Adjustable	Adjustable
WATERPROOF	1 m	1 m
OPERATING TEMP	5 °F to 131 °F	5 °F to 131 °F





## SIGNATURE™ HD SPOTTING SCOPE

Elevate your glassing experience with Burris's Signature HD Spotting Scope. The 20-60x magnification range allows you to save time and boot leather to spot trophy animals from a distance. The HD lenses and apochromatic lens system eliminate color fringing to deliver superb edge-to-edge resolution.

### SIGNATURE HD SPOTTING SCOPE

ITEM # 300103 | MSRP \$2,148



### SPECIFICATIONS

#### SIGNATURE HD SPOTTING SCOPE

ITEM NUMBER	300103
MAGNIFICATION	20 - 60x
OBJECTIVE DIAMETER	85 mm
FIELD OF VIEW @ 1000 yd	55 ft- 110 ft
EYE RELIEF	18 mm - 19.7 mm
EXIT PUPIL	4.25 mm - 1.4 mm
FOCUS	Fine Focus
LENGTH (ZERO DIOPTER)	16.25 in.
WEIGHT	70.4 oz
OPERATING TEMPERATURE	-5 °F to 150 °F
WATERPROOF	IPX7







**Burris**

FIND WHAT MATTERS

# ARCHERY





# ORACLE™ X

## CROSSBOW SCOPE

The most innovative and technologically advanced crossbow scope available today, the Oracle X mounts seamlessly on your crossbow. Its built-in laser rangefinder gives you the exact aiming point. The automatic trajectory compensation eliminates holdover and compensates for distance and angle.



Oracle XB 124 Reticle



WATERPROOF



SHOCKPROOF



FOGPROOF

## SPECIFICATIONS

### ORACLE X RANGEFINDING CROSSBOW SCOPE

MSRP \$1,200 | LED TRAJECTORY BAR | ITEM # 300410

- Integrated inclinometer helps to determine shot placement for steep angle shots
- Program and save up to two bolt profiles to cover lightweight, fast bolts and heavy, high penetration bolts for different hunts
- Wireless remote
- Water-Resistant
- Digital level reduces unwanted cant
- Rugged, lightweight composite construction
- Precise aluminum mount/adjustment system
- Locking screws to ensure adjustments stay in place

ITEM NUMBER	300410
WEIGHT	20 oz
BATTERY	CR 123
BATTERY LIFE	2,000+ Ranges
LASER TO REFLECTIVE TARGET	500 yd
LASER TO DEER	200 yd
OPERATING TEMP	-22 °F to 149 °F
STORAGE TEMP	-40 °F to 158 °F





# TACTICAL.





# XTR™ PS RIFLESCOPE



## NEW

### XTR PS 5.5-30x56 MM

ITEM # 201230 | MSRP \$2,760

Developed with competitive and long-range tactical shooters in mind, the new XTR PS combines our micro-adjustable PEK (Programmable Elevation Knob) technology with our industry leading XTR precision riflescope to provide rapid and accurate bullet drop compensation at distances far exceeding traditional competition and tactical optics.

Built on a rugged, one-piece 34mm main tube chassis, and powered by the BurrisConnect ballistics app, the XTR PS sets a new performance benchmark.

XTR PS users can dial their point-of-impact up to 19 MILS in a single rotation down to an unparalleled 1/30 MIL resolution. Additional features including a digital level, competition focused countdown timer, and over 20 density altitude settings onboard the scope make this optic truly one of a kind.



WATERPROOF



SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



BLUETOOTH



HEADS-UP DISPLAY

## SPECIFICATIONS


ITEM #	201220		201230	
MAGNIFICATION	3.3-18x50 mm		5.5-30x56 mm	
OBJECTIVE OUTER TUBE DIAMETER	44.5mm		51.5mm	
OCULAR DIAMETER	41mm		41mm	
TUBE DIAMETER	34mm		34mm	
OBJECTIVE LENS DIAMETER	50mm		56mm	
FIELD OF VIEW (FT @ 100 YARDS)	low high	36 6.7	low high	21.5 4.2
EYE RELIEF	low high	90 mm 88 mm	low high	85 mm 95 mm
EXIT PUPIL	low high	8.0 2.5	low high	8.0 1.7
RETICLE	SCR2-MIL ILLUM		SCR2-MIL ILLUM	
FOCAL PLANE	Front		Front	
PARALLAX FOCUS	25 to infinity		Fixed 20 to infinity	
BATTERY (FOR ILLUMINATED MODELS ONLY)	CR123A		CR123A	
LENGTH	13.3"		15.4"	
WEIGHT	35.2 oz		37.5 oz	
ELEVATION KNOB	Digital MIL		Digital MIL	
TOTAL ELEVATION ADJUSTMENT RANGE	35 MIL		26 MIL	
WINDAGE TURRET GRADUATIONS (CLICKS)	0.1 MIL		0.1 MIL	
TOTAL WINDAGE ADJUSTMENT RANGE	15 MIL		15 MIL	
OPERATING TEMPERATURE	-20 °F to +140 °F		-20 °F to +140 °F	
STORAGE TEMPERATURE	-40 °F to +160 °F		-40 °F to +160 °F	
WATERPROOF RATING	IPX7		IPX7	

## NEW

### XTR PS 3.3-18x50 MM

ITEM # 201220 | MSRP \$2,520



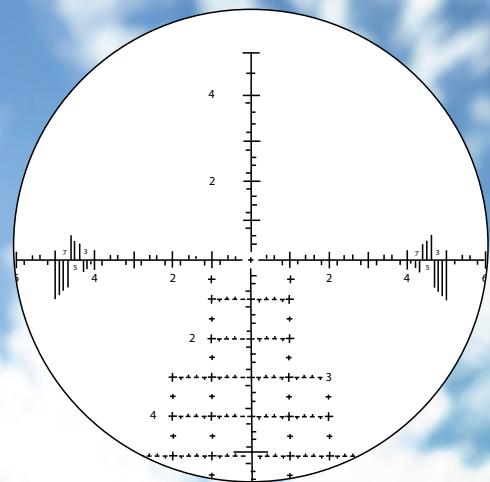

SCR2 MIL



## XTR PRO™ RIFLESCOPES

Our best competition riflescope ever, the XTR Pro once again raises the bar. Designed and manufactured in Greeley, Colorado, this next-generation long-range competition optic puts you on target at extreme ranges with innovation only Burris provides. Outpace the competition with exclusive features, including the Burris Race Dial and new tool-less Zero Click Stop Elevation Knob, and achieve better accuracy with three reticle options and best-in-class optical clarity.



WATERPROOF




SHOCKPROOF



FOGPROOF



NITROGEN-FILLED



Proudly designed, machined,  
and assembled in the USA.

### XTR PRO RIFLESCOPE SERIES

#### XTR PRO BLACK RIFLESCOPE 5.5-30X56 - BLACK

MSRP \$2,760 | SCR2 MIL | ITEM # 202222

MSRP \$2,760 | SCR2 1/4 MIL | ITEM # 202223

MSRP \$2,760 | TREMOR™ 5 | ITEM # 202224



## SPECIFICATIONS

XTR PRO RIFlescopes		5.5-30x56	5.5-30x56
ITEM NUMBER		202212, 202213, 202214	202222, 202223, 202224
FINISH		RED	BLACK
MAGNIFICATION		5.5-30x	5.5-30x
OBJECTIVE LENS DIAMETER		56 mm	56 mm
OBJECTIVE END DIAMETER		63.5 mm	63.5 mm
OCULAR END DIAMETER		43.69 mm	43.69 mm
TUBE DIAMETER		1 in.	1 in.
FIELD OF VIEW (feet @ 100 yards)	Low	23 ft	23 ft
	High	4.2 ft	4.2 ft
EYE RELIEF	Low	3.2 in.	3.2 in.
	High	4 in.	4 in.
EXIT PUPILS	Low	8.6 mm	8.6 mm
	High	1.8 mm	1.8 mm
FOCAL PLANE		FFP	FFP
DIOPTER SETTING		+2 to -3	+2 to -3
LENGTH		15.16 in.	15.16 in.
WEIGHT		35.3 oz	35.3 oz
ELEVATION ADJUSTMENT TOTAL CAPACITY		26 mil	26 mil
WINDAGE ADJUSTMENT TOTAL CAPACITY		15 mil	15 mil
CLICK VALUE		1/10 mil	1/10 mil

\* NOTE: The illuminated reticle scopes are powered by a CR2032 Battery.

## XTR PRO SERIES FEATURES

### • QUICK DETACH RACE DIAL

The Burris Race Dial elevation turret features a whiteboard-style coating. Shooters can use a dry/wet erase marker to mark and identify each target's click value on a given stage. Users can easily swap between two new Quick Detach turret caps, including the Burris QD Race Dial and standard black QD Dial, by squeezing two release buttons located on the sides of each cap.

### • TOOLLESS ZERO CLICK STOP

Open the Cam Lever on the top of the Tool-less Zero Click Stop turret to quickly change zero.

### • ADVANCED WINDAGE & ELEVATION ADJUSTMENT




Accurate and repeatable reticle adjustments match the measurement system of the reticle to make the windage and elevation adjustments fast and easy. The scope also comes with a cap for the windage knob.

### • THROW LEVER

The optional Burris throw lever provides a simple mechanical advantage for faster and easier magnification changes.

### • SWITCH ILLUMINATION COLORS

All reticles include red and green illumination settings with 11 levels of brightness each. Conveniently located off positions separate each brightness setting.



HORUS TREMOR 5



**XTR III™**  
RIFLESCOPES

A Colorado original. Engineered and designed out West where distance is measured in hours instead of yards. This next-generation long-range competition puts you on target at extreme ranges with best-in-class features such as an industry-best field of view, 5x plus zoom range, a choice of three front focal plane reticles, race dial options, and more.



### XTR III RIFLESCOPE SERIES



#### XTR III RIFLESCOPE 5.5-30x56

MSRP \$1,800 RETICLE SCR2 MIL | ITEM # 201214



#### XTR III RIFLESCOPE 3.3-18x50

MSRP \$1,560 | RETICLE SCR2 MIL | ITEM # 201204




## SPECIFICATIONS


XTR III RIFLESCOPES		3.3-18x50	5.5-30x56
ITEM NUMBER		2001203/204	201213/214
MAGNIFICATION		3.3-18x	5.5-30x
OBJECTIVE LENS DIAMETER		50 mm	56 mm
OBJECTIVE END DIAMETER		58 mm	63.5 mm
OCULAR END DIAMETER		44.25 mm	44.25 mm
TUBE DIAMETER		34 mm	34 mm
FIELD OF VIEW (feet @ 100 yards)	Low	37.5 ft	23 ft
	High	6.8 ft	4.2 ft
EYE RELIEF	Low	3.25 in.	3.25 in.
	High	4.0 in.	4.0 in.
EXIT PUPILS	Low	8.6 mm	8.6 mm
	High	2.7 mm	1.8 mm
DIOPTER SETTING		+2 to -3	+2 to -3
RETICLE PLANE		Front	Front
RETICLE		SCR MOA / SCR MIL	SCR MOA / SCR MIL
LENGTH		13.3 in.	15.16 in.
WEIGHT		31.4 oz	33.5 oz
ELEVATION TURRET MARKING GRADUATIONS		1/10 in. mil or 1/4 MOA	1/10 in. mil or 1/4 MOA
TOTAL ELEVATION ADJUSTMENT RANGE*		120 MOA / 35 MIL	90 MOA/ 26 MIL
WINDAGE TURRET GRADUATIONS (Clicks)		1/10 in. mil or 1/4 MOA	1/10 in. mil or 1/4 MOA
TOTAL WINDAGE ADJUSTMENT RANGE*		55 MOA / 16 MIL	51.6 MOA / 15 MIL
PARALLAX/FOCUS RANGE		25 yd to Infinity	25 yd to Infinity

\* NOTE: All illuminated reticle scopes are powered by a CR2032 Battery.

\* Example: 50 MOA total adjustment range equates to roughly 25 MOA in either direction from center.



SCR™ MOA



SCR2 MIL

### SERIES FEATURES

- A 34-mm tube for extended adjustment range
- 5x zoom with 150° power ring rotation
- Improved optical system with a larger field of view, smaller eyepiece signature, and generous eye box at all magnifications
- Oversize tactical knobs with a Race Dial option or PRS and NRL style shooting
- Two reticle options in MIL or MOA
- Zero click stop for dependability



# FASTFIRE™ E ENCLOSED REFLEX SIGHT

The FastFire E establishes a new standard in red dots with a 60,000-hour battery life and ultra-rugged monolithic machined aluminum housing. The waterproof, shockproof, and fogproof closed emitter construction protects the emitter from environmental damage and obstructions like snow or mud and is ready for any competition, duty, or hunting setup.

Combined with a 3.5-MOA "always on" aiming dot, means the FastFire E maintains reliable operational readiness for any scenario.



## NEW FASTFIRE™ E

ITEM # 300266 | RED DOT | MSRP \$420  
ITEM # 300267 | GREEN DOT | MAP \$420



WATER RESISTANT



SHOCKPROOF



FOGPROOF



## SPECIFICATIONS

FASTFIRE E	300266   200267
MAGNIFICATION	1x
SIGHT WINDOW	22mm x 17mm (0.87" x 0.67")
RETICLE	3.5 MOA
ELEVATION ADJUSTMENT RANGE	80 MOA
WINDAGE ADJUSTMENT RANGE	80 MOA
ADJUSTMENT GRADUATION (MOA per tick mark)	4 MOA
OPERATING TEMPERATURE RANGE	-4°F to +140°F (-20°C to +60°C)
POWER SUPPLY	One CR2032 Lithium battery
DIMENSIONS: (LxWxH)	1.61" x 0.99" x 0.98" (40.8mm x 25.1mm x 24.9mm)
WEIGHT	2.4 oz. (69.6 grams)
DEFAULT TO AUTOBRIGHTNESS	5 hours
BATTERY LIFE	25,000 hours on Medium





# FASTFIRE™ C

## RED DOT REFLEX SIGHT

Burris Optics introduces the FastFire C, the latest innovation in our red dot optics, designed for everyday and concealed carry with sub-compact and micro-compact pistols. The FastFire C provides durability and reliability, with an always-on technology and a remarkable 25,000-hour runtime, powered by a CR2032 battery.

The low profile allows for absolute or 1/3 cowitness with standard open sights, eliminating the need for elevated sights. Designed with an intelligent auto-bright system and manual illumination settings, this compact red dot guarantees optimal visibility in any lighting condition.



WATER RESISTANT



SHOCKPROOF



FOGPROOF



### FASTFIRE C RED DOT

#### FASTFIRE™ C

MSRP \$240 | 6 MOA DOT | ITEM # 300239



## SPECIFICATIONS

FASTFIRE C	300239
MAGNIFICATION	1x
SIGHT WINDOW	22 mm x 17 mm (0.87 in. x 0.67 in.)
RETICLE	6 MOA
ELEVATION ADJUSTMENT RANGE	80 MOA
WINDAGE ADJUSTMENT RANGE	80 MOA
ADJUSTMENT GRADUATION (MOA per tick mark)	4 MOA
OPERATING TEMPERATURE RANGE	-4 °F to +140 °F (-20°C to +60°C)
POWER SUPPLY	One CR2032 Lithium Battery
DIMENSIONS: (LxWxH)	1.61 in. x 0.99 in. x 0.98 in. (40.8 mm x 25.1 mm x 24.9 mm)
WEIGHT	0.44 oz (12.5 g)
DEFAULT TO AUTOBRIGHTNESS	5 hr
BATTERY LIFE	25,000 hours on Medium
MOUNT PLATFORM	RMSC (Not Included)



### FASTFIRE C FEATURES

- Compact & lightweight
- 1x magnification
- Bright red 6 MOA aiming dot
- Burris Intelligent Auto-Bright
- Windage & elevation adjustments
- Aspherical glass lens





# FASTFIRE™ RED DOT REFLEX SIGHT

Get instant dot-on-target accuracy for any firearm, from handguns to shotguns, and for any sport, from 3-Gun to wing shooting. From patrol to plinking, the FastFire offers a wide range of reticle options, extended battery life, and four models, making it the most versatile red dot reflex sight you can mount.



WATER RESISTANT



SHOCKPROOF



FOGPROOF



## FASTFIRE™ 4


MSRP \$480 | MULTI-RETICLE | ITEM # 300234



## FASTFIRE™ 3

MSRP \$288 | 3 MOA DOT | ITEM # 300234

MSRP \$288 | 8 MOA DOT | ITEM # 300236



## FASTFIRE SERIES FEATURE

- Bright red dot allows for fast target acquisition and easy aiming
- Compact and lightweight, so it won't affect firearm balance or handling
- 1x magnification allows both-eyes-open shooting, for enhanced awareness and target acquisition
- Parallax-free for better accuracy
- Mounts to almost anything—including handguns, rifles, and shotguns—using Burris mounting systems

- Windage and elevation adjustments make fine-tuning easy
- Index-matched, Hi-Lume® multicoating provides low-light performance and glare elimination
- Nitrogen-filled and waterproof tubes prevent internal fogging in cold and rain
- Shockproof design stands up to years of punishing recoil
- Comes with our Burris Forever Warranty™



## SPECIFICATIONS

FASTFIRE™ SERIES	FASTFIRE™ 3	FASTFIRE™ 3	FASTFIRE™ 4
ITEM NUMBER	300234	300236	300259
SIGHT WINDOW	21 mm x 15 mm	21 mm x 15 mm	
EYE RELIEF	Unlimited	Unlimited	Infinite
RETICLE	3 MOA	8 MOA	Multi-Reticle
ELEVATION ADJUSTMENT RANGE	115 MOA	115 MOA	90 MOA
WINDAGE ADJUSTMENT RANGE	86 MOA	86 MOA	90 MOA
ADJUSTMENT GRADUATION (MOA per tick mark)	1 MOA	1 MOA	1 MOA
POWER SUPPLY	CR1632	CR1632	CR1632
LENGTH	1.9 in.	1.9 in.	1.9 in.
WEIGHT	1.5 oz	1.5 oz	1.6 oz
MOUNT TYPE	Docter/Noblex	Docter/Noblex	Docter/Noblex
PARALLAX/FOCUS RANGE	Parallax-free	Parallax-free	Parallax-free

\* NOTE: The Fastfire 3 and Fastfire 4 sights come with a Picatinny mount.



OD GREEN  
ITEM # 626058  
MSRP \$36.00



FDE TAN  
ITEM # 626059  
MSRP \$36.00



BLUE  
ITEM # 626059  
MSRP \$36.00



RED  
ITEM # 626056  
MSRP \$36.00







FIND WHAT MATTERS

# RINGS & MOUNTS





# FASTFIRE™ MOUNTS

Ensure the longevity and durability of your FastFire sight with our premium selection of AR FastFire mounts and protector mounts. Crafted with meticulous precision, each mount features sturdy metal wings designed to safeguard your sight's lens from any unexpected impacts or mishandling. Versatile compatibility with both Weaver and Picatinny-style bases ensures seamless integration with a wide range of setups, guaranteeing peace of mind and optimal performance in any shooting scenario.

## AR-F3™

MSRP \$65 | MOUNT ONLY | ITEM # 410348

COMPATIBLE WITH FASTFIRE 2 & 3 SIGHTS.

HEIGHT TO CENTER OF SIGHT 1.25" | DOCTER/NOBLEX FOOTPRINT



## AR-F4™

MSRP \$130 | MOUNT ONLY | ITEM # 410347

COMPATIBLE WITH FASTFIRE 4 SIGHTS.

HEIGHT TO CENTER OF SIGHT 1.28" | DOCTER/NOBLEX FOOTPRINT



## PICATINNY PROTECTOR MOUNT

MSRP \$100 | MOUNT ONLY | ITEM # 410330

COMPATIBLE WITH FASTFIRE 2 & 3 SIGHTS.

HEIGHT TO CENTER OF SIGHT 0.75" | DOCTER/NOBLEX FOOTPRINT



WATERPROOF



SHOCKPROOF





# FASTFIRE™ MOUNTS

These mounts securely attach any generation FastFire Series Red Dot Sight to a specific firearm, with options for handguns, rifles, and shotguns.



## FASTFIRE MOUNTS

ITEM NUMBER	MOUNT	PRICE
410321	1911 Standard	\$65
410322	1911 Adjustable/Novak	\$65
410323	Kimber® Standard/Targei/Bomar	\$65
410324	Beretta® 92 & 96/90Two/Cougar/Taurus PT99	\$65
410319	Glock 45 ACP & 10mm, + PX4 Storm	\$65
410327	Sig Sauer® P226	\$65
410328	Springfield XD®	\$65
410336	Smith & Wesson® M&P®	\$65
410318	Ruger American Pistol	\$65
410329	Ruger® Mark I, II, III, IV.	\$65
410332	Ruger® M77, No. 1, Super Redhawk, Super Blackhawk Hunter	\$65
410333	Marlin® 336, 444, 1895 (Pre-drilled and tapped)	\$65
410334	Winchester® M94 (Pre-drilled and tapped)	\$65
410335	Picatinny/Weaver	\$49
410635	Sako® Rifles (Requires Picatinny Mount # 410335)	\$65

\* Doctor/Noblex Footprint



# RINGS & MOUNTS


Hunters and tactical shooters count on Burris mounting solutions, offering a wide variety of options to securely mount a riflescope onto any Weaver or Picatinny-style rail. These rings and bases deliver long-lasting holding power and durability for hunters, duty officers, and competitive shooters.

## AR-P.E.P.R.™ MOUNTS

- Full ring and base mounting solution in one
- Allows up to 2 inches of forward scope positioning
- Provides optimum eye relief and full field of view
- Includes both smooth and Picatinny ring tops
- Quick-detach models allow for fast mounting



**AR-P.E.P.R.  
Quick-Detach  
Model**

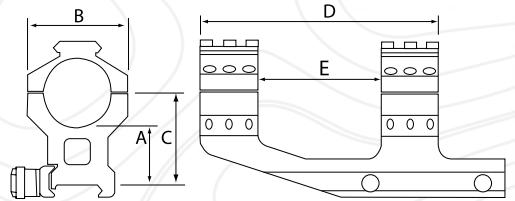


Dimensions

Item	Size	Weight	A	B	C	D	E	QD MOUNT	CANT
410341	30 mm	8.7 oz	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.		0 MOA
410342	30 mm	8.7 oz	1.00 in.	1.75 in.	1.60 in.	4.15 in.	2.15 in.	•	0 MOA
410343	1 in.	8.3 oz	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.		0 MOA
410344	1 in.	8.3 oz	1.00 in.	1.57 in.	1.50 in.	4.15 in.	2.15 in.	•	0 MOA
410345	34 mm	6.9 oz	0.68 in.	1.90 in.	1.35 in.	4.92 in.	2.90 in.		20 MOA



## AR-SIGNATURE QD™ P.E.P.R.™ MOUNTS

- New streamlined design with QD mount insures  $\frac{1}{4}$  MOA re-mount capability and allows for use of back up iron sights while maintaining proper eye-relief.
- Available in 30-, 34-, and 35-mm options with Burris' Signature polymer ring inserts, it provides adjustment from 5 to 40 MOA without using windage/elevation knobs.

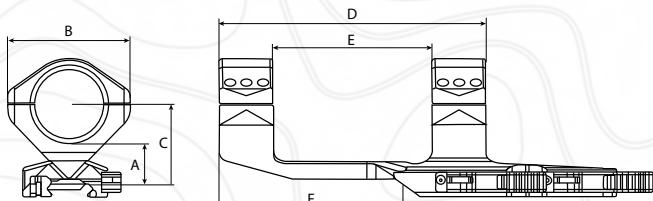

Dimensions

Item	Size	Weight	A	B	C	D	E	F	QD MOUNT
410352	30 mm	10.33 oz	.81 in.	2.13 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•
410353	34 mm	10.09 oz	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•
410354	35 mm	10.09 oz	.76 in.	2.28 in.	1.5 in.	5.0 in.	3.0 in.	3.45 in.	•

# RINGS & MOUNTS

Xtreme Tactical Rings are built to withstand brutal use from competitors and tactical operators. They are lightweight, have plenty of holding power, and can endure any amount of recoil.

## XTR RINGS™

- 1-in. and 30-mm models are lightweight aluminum with incredible holding power
- Quick-detach models allow fast mounting

Item	Size	Quick-Detach	Aluminum	Steel	1 Ring	2-Ring Set
<b>Low</b>						
420160	30 mm		•			•
420161	30 mm		•		•	
420180	1 in.		•			•
<b>Medium</b>						
420162	30 mm		•			•
420163	30 mm		•		•	
420181	1 in.		•			•
<b>High</b>						
420164	30 mm		•			•
420165	30 mm		•		•	
420182	1 in.		•			•
<b>Extra-High</b>						
420166	30 mm		•			•
420167	30 mm		•		•	
420183	1 in.		•			•
<b>Picatinny Ring Top - allows attachment of accessories on top of mounted scope</b>						
420169	30 mm		•		•	




Low



Extra-High



Picatinny Ring Top



## RING HEIGHTS

These are the dimensions of Xtreme Tactical Rings, from the center of the scope to the top of the mount base.

	Low	Medium	High	Extra-High
30 mm	0.85 in.	1.10 in.	1.35 in.	1.60 in.
1 in.	0.75 in.	1.00 in.	1.25 in.	1.50 in.



High



Low



Pos-Align® Offset Inserts

## XTR SIGNATURE RINGS™


- Provide precision customization of cant maximizes usable elevation adjustment of the scope. Included inserts allow for 5, 10, 15, 20, 25, and 40 MOA of cant
- Provide 100% scope-to-ring contact, eliminating the need to lap rings while providing tremendous gripping power without leaving ring marks
- Strong, lightweight aluminum rings feature solid steel dual screw clamps that ensure each ring mounts flat and centered on any Picatinny base
- Includes the following Pos-Align® Offset Inserts: Concentric (Zero MOA), +/- .005", +/- .010", and +/- .020" (2 sets)

## RING HEIGHTS

These are the dimensions of XTR Signature Rings, from the center of the scope to the top of the mount base.

Item	Height	Size
420210	1.00 in.	34 mm
420211	1.50 in.	34 mm
420221	1.00 in.	30 mm
420222	1.25 in.	30 mm

Item	Height	Size
420223	1.50 in.	30 mm
420231	1.00 in.	1 in.
420232	1.25 in.	1 in.
420233	1.50 in.	1 in.



## XTR Signature Ring Inserts Provided:

- One set of zero's
- One set of +5 and -5 (equal to +/- .005")
- One set for +10 and -10 (equal to +/- .010")
- Two sets of +20 and -20 (equal to +/- .020")

## 1/2-INCH PICATINNY RISER

- Provides 1/2 inch of additional mounting height for optimal sight alignment on tactical platforms



Item	Height	Length
410340	0.5 in.	1.5 in.

# RINGS & MOUNTS

Burris Signature Rings set the industry standard for quality. Crafted from solid steel, these rings cater to various optics and bases, making them ideal for hunting. Pos-Align Inserts offer tremendous gripping power and durability without damaging the scope finish. The 1-in. or 30-mm sizes work with standard, dovetail, double-dovetail, and Weaver-style bases. Covered by the Burris Forever Warranty™

## Signature Universal Dovetail Rings

Item	Size	Height	Finish
<b>Signature Universal Dovetail</b>			
420501	1 in.	Medium	Matte
420511	1 in.	High	Matte
420578*	30 mm	Medium	Matte
420581*	30 mm	High	Matte
420582*	30 mm	Extra-High	Matte



## Signature Rimfire/Airgun Rings

Item	Size	Height	Finish
<b>Signature Rimfire/Airgun</b>			
420554	1 in.	Medium	Matte
420556	1 in.	High	Matte



Comes with clamps for 11 mm and 3/8-in. dovetails

## SIGNATURE RINGS

- Revolutionary Pos-Align® Inserts technology
- Pos-Align Inserts guarantee perfect centering and maximum scope-to-ring contact for tremendous gripping power without damaging the scope finish
- Virtually sight in your gun without moving the scope adjustments
- Corrects misalignment caused by off-center receiver holes
- Corrects for slightly off-center bases or rings
- No need for expensive tapered bases or shimming for thousand-yard shooting
- Solid steel rings are ideal for hunting

Available for 1-in. rings (**ITEM 626019**), sold separately. Pos-Align Offset Insert Kits include one each of the following inserts: +5 and -5 (equal to +/- .005") +10 and -10 (equal to +/- .010") +20 and -20 (equal to +/- .020") 30-mm rings come with two sets of (0) and two sets of +10 and -10. 34-mm rings come with two sets of (0), one set of +10 and -10, and one set of +20 and -20.

## Signature Zee Rings

Item	Size	Height	Finish
<b>Signature Zee Rings (Weaver-Style)</b>			
420520	1 in.	Medium	Black Gloss
420521	1 in.	Medium	Matte
420522	1 in.	Medium	Nickel
420530	1 in.	High	Black Gloss
420531	1 in.	High	Matte
420532	1 in.	High	Nickel
420585*	30 mm	Extra-High	Matte
420587*	30 mm	High	Matte
420588*	30 mm	Medium	Matte
420590	34 mm	High	Matte
420591	34mm	Medium	Matte



## Pos-Align® Offset Inserts

### Signature Pos-Align® Offset Inserts

#### Installation Kit

626019 1 each of +/- .005, +/- .010, +/- .020


#### Gunsmith Kit

626024 10 each of +/- .005, +/- .010, +/- .020

#### Individual Inserts

626017 +/- .010 Eccentric Offset


626018 +/- .020 Eccentric Offset

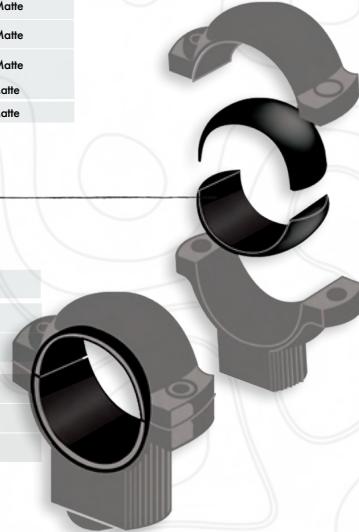

## RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Signature 1 In.		0.77	0.89	
Signature 30 mm		0.78	0.89	1.02
Zee Signature 1 In.		0.77	0.92	
22 Signature Deluxe		0.90	1.29	
Zee Signature 30 mm		0.81	0.93	1.18

Dimensions are from the centerline of the scope tube to the bottom of the ring.

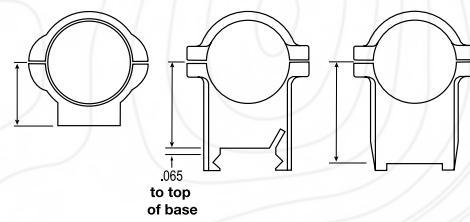



# RINGS & MOUNTS



## ZEE RINGS

- Tough, solid steel
- Weaver-style
- Machined to exacting tolerances to handle recoil or abuse

Item	Size	Height	Finish	Quick-Detach
<b>Weaver-Style</b>				
420031	1 in.	Low	Matte	•
420034	1 in.	Medium	Matte	•
420044	30 mm	Medium	Matte	
420077	30 mm	High	Matte	
420079	1 in.	Low	Nickel	
420080	1 in.	Low	Black Gloss	
420081	1 in.	Medium	Black Gloss	
420082	1 in.	High	Black Gloss	
420083	1 in.	Low	Matte	
420084	1 in.	Medium	Matte	
420086	1 in.	High	Nickel	
420087	1 in.	High	Matte	

## RIMFIRE/AIRGUN RINGS

- Available in solid steel or aluminum
- Securely mount your rimfire or airgun optic

Item	Size	Height	Finish	Material	Quick-Detach
<b>.22 Ring Pairs (fits in 22-in. grooved receivers)</b>					
420069	1 in.	Medium	Matte	Steel	
420072	1 in.	Medium	Black Gloss	Steel	
420073	1 in.	High	Black Gloss	Steel	
420076	1 in.	High	Matte	Steel	
420068	1 in.	Medium	Matte	Steel	•



## CZ-STYLE RINGS

- Solid steel
- Designed for mounting optics on CZ rifles

Item	Size	Height	Finish	Action
<b>CZ 550</b>				
420130	1 in.	Medium	Matte	Long-Action
<b>CZ 527</b>				
420140	1 in.	Medium	Matte	Short-Action



## TIKKA® T3® RINGS

- Solid steel
- Ring and base solution specifically designed for Tikka® T3® rifle


Item	Size	Height	Finish
<b>Tikka T3 Rings</b>			
420135	1 in.	Medium	Matte
420136	30 mm	Medium	Matte
420137	30 mm	High	Matte



## RING HEIGHTS

Ring Heights	Low	Medium	High	Extra-High
Standard 30 mm		0.78	0.89	1.02
Zee 1 in. & Quick-Detach 1 in.	0.63	0.76	0.95	
Zee 30 mm		0.81	0.93	1.18
CZ (All)		1.00		
1-In. .22 Rings (All)		0.80	0.95	
Tikka T3	1.125	1.250		

Dimensions are from the centerline of the scope tube to the bottom of the ring.

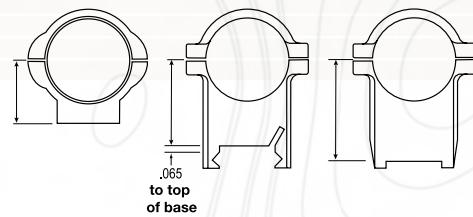



### XTREME TACTICAL™ 1 PIECE BASES

The new Xtreme Tactical one-piece bases offer the perfect mounting solution for precision shooters. In addition to greater strength and rigidity, the 25 MOA cant offers extended range capability.

- Milled from a single piece of solid steel
- Compatible with all Weaver-style, Picatinny-style rings
- Designed to work with both short and long actions
- Matte finish

Item	Style	MOA Cant
410650	XTB-Sav Round Rear Long	25
410651	XTB-Sav Round Rear Short	25
410652	XTB-700 Long Action - Howa 1500 Long Action	25
410653	XTB-700 Short Action	25
410655	XTB-Howa 1500 Short Action	25
410658	XTB-TIKKA® (Tikka®)	25
410660	XTB-Sav Round Rear Long	No Cant
410661	XTB-Sav Round Rear Short	No Cant
410662	XTB-700 Long Action - Howa 1500 Long Action	No Cant
410663	XTB-700 Short Action	No Cant
410665	XTB-Howa 1500 Short Action	No Cant
410668	XTB-TIKKA® (Tikka®)	No Cant

# RINGS & MOUNTS



### XTREME TACTICAL™ 2-PIECE BASES

- Solid steel bases work with all Weaver-style, Picatinny-style, and mil-spec rings
- Engineered with minimal height and weight
- Mil-spec cross slots guarantee rock-solid attachment
- Matte finish

Item	Style	Reversible Front Base
410600	XTB-700/7 (Remington® 700 & 7 Short & Long)	•
410605	XTB-70/Express (Winchester® 70 Short, Long & Express)	•
410615	XTB-SavR (Savage® Short & Long Round Rear)	•
410620	XTB-SavF (Savage® Short & Long Flat Rear)	•
410625	XTB-ABOLT (Browning® A-Bolt Short & Long)	•
410630	XTB-TIKKA® (Tikka®)	•
410635	XTB-SAKO® Dovetail (SAKO® Dovetail Steel Base Low Profile)	



### RUGER®-TO-WEAVER BASE ADAPTER

- For use with Zee Rings
- Mounts optics onto Ruger® firearms that feature the proprietary Ruger® integral mounting system

Item	Compatible with Ruger® Firearm
410990	M77®, Super Redhawk®
410991	No. 1, 77/22®, 77ML®, 77/44®, Mini-14®, Redhawk®
410992	M77® for use with Eliminator® LaserScope®



**SIGNATURE WARRANTY**  
BURRIS OPTICS





## BURRIS SIGNATURE WARRANTY

Same Legendary Coverage, Now Global  
Burris's trusted Forever warranty now extends worldwide as The Signature Warranty, delivering the same protection now available to our international customers.

### UNITED STATES CUSTOMERS

Thank you for choosing Burris. You can be confident that the optic you purchased is built to the most exacting standards. You can count on Burris to perform every time you use it. We're so confident in the craftsmanship of our optics products that we back them with a legacy coverage. Please review our warranty terms at <https://www.burrisoptics.com/support/warranty> or call 1-888-440-0244 for a copy.

### INTERNATIONAL CUSTOMERS

For purchases made outside the United States, Burris Optics nonthermal optics products are covered against defects in materials and workmanship. Warranty claims must be processed through the retailer or distributor where the product was purchased. Since warranty policies vary by country, customers should work directly with their dealer for resolution. To facilitate a smooth warranty process, customers should retain their proof of purchase and familiarize themselves with any additional country-specific warranty provisions that may apply. Burris is committed to upholding high-quality standards and customer satisfaction worldwide, ensuring that all eligible products receive the necessary service or replacement in accordance with local regulations.

For the fastest service regarding REPAIRS, WARRANTY SERVICE and PARTS register in our Support Portal. You must be registered and must have received a Return Authorization (RMA). Burris cannot be responsible for your riflescope until we physically receive it.

The illustrations, descriptions, and specifications in this brochure are intended as a general guide and are not binding. Burris reserves the right to make any changes deemed necessary to improve its products or to meet manufacturing or commercial requirements at any time without prior notice.

© Copyright 2026  
Burris Company Inc.  
331 E. 8th Street  
Greeley, CO 80631  
[www.burrisoptics.com](http://www.burrisoptics.com)



### BURRIS CUSTOMER SERVICE

**1-888-440-0244**

[customerservice@burrisoptics.com](mailto:customerservice@burrisoptics.com)  
[www.burrisoptics.com/support/customer-service](http://www.burrisoptics.com/support/customer-service)





# Burris

FIND WHAT MATTERS



BURRIS COMPANY  
331 E. 8TH STREET  
GREELEY, CO 80631  
PHONE: 1-888-440-0244  
**WWW.BURRISOPTICS.COM**



2026 BURRIS COMPANY. ALL RIGHTS RESERVED  
BURRIS COMPANY IS OWNED BY BERETTA HOLDING S.P.A.